

FEATURES

- Top diffuser ensures even distribution of water over the filter media.
- Oil filled pressure gauge.
- Materials are reliable, non-corrosive and designed for all weather conditions.
- UV treated to be able to work in direct sunlight.
- Suitable for all filter media; sand, zeolite and glass.
- Warranty: 5 years on tank, 12 months on multi port valve, pressure gauge and internals.


SPECIFICATIONS

Filter Size	Model	Valve Port Size	Filter Area (m ²)	Flow Rate
20 inch	SF500P	40mm / 1.5"	0.22	180L/min
25 inch	SF650P	40mm / 1.5"	0.31	255L/min
28 inch	SF700P	40mm / 1.5"	0.39	320L/min

DIMENSIONS & MEDIA QUANTITIES

Model	A (mm)	B (mm)	Filter media quantity required (guide only)			
			Sand kg / bags	Zeolite kg / bags	Coarse Glass kg / bags	Fine Glass kg / bags
20 inch SF500P	845	527	80 / 4	60 / 4	25 / 2	40 / 3
25 inch SF650P	950	627	140 / 7	105 / 7	45 / 3	60 / 4
28 inch SF700P	1020	703	220 / 11	165 / 11	60 / 4	105 / 7

Sand size may differ from country to country and therefore sand weights may vary.

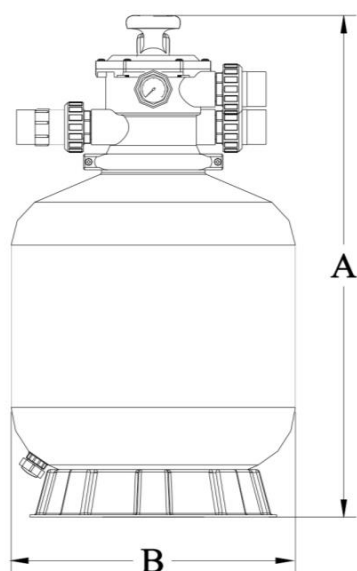

**AVAILABLE FROM YOUR
LOCAL STOCKIST:**